


CITY OF CITRUS HEIGHTS GENERAL SERVICES DEPARTMENT

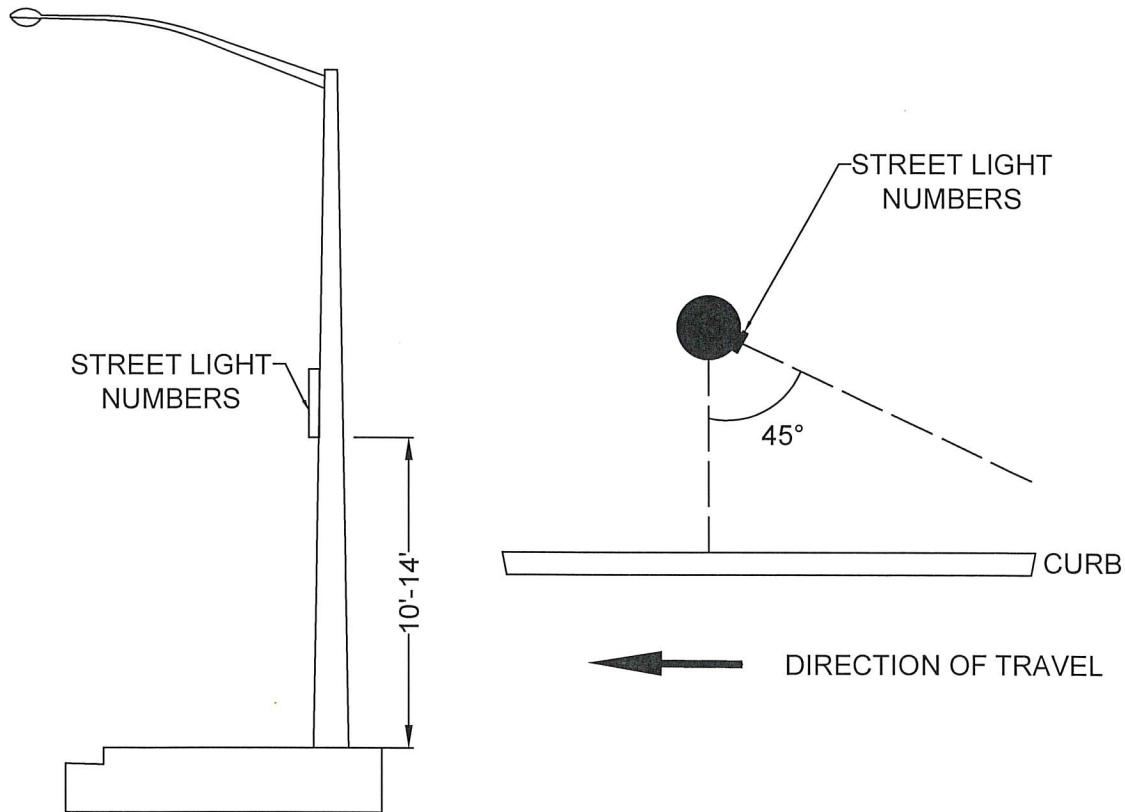

Street Light Numbering System:

The numbering system for street lighting is determined by the City of Citrus Heights General Services Department (GSD). It is the responsibility of the developer/contractor to install assigned numbers on new street light poles. The developers/contractors shall contact the GSD to obtain the assigned number prior to installation of a new street light pole.

Materials:

Numbers shall be 2" D Series Black, mounted vertically on a 2 $\frac{1}{4}$ " X 12" strip of White 3M Engineering Grade reflective tape or approved equal.

Mounting of the Numbers:

The street light numbers shall be located 10 to 14 feet above ground level. The exact height shall be based upon optimum visibility of the numbers with consideration for other regulatory and/or warning signs mounted on the street light pole. The numbers shall be placed on a 45 degree angle to the approaching traffic lane nearest the street light pole.

APPROVED BY:

Leslie Blomquist
LESLIE BLOMQUIST, CITY ENGINEER

STREET LIGHT NUMBERING DETAIL

APPROVAL DATE: 4-10-2023

SCALE: NONE

DRAWN BY: Rachel Mauldin

CD - 21